

Midi-R



Standard equipment:

Midi-R 66BT



- 2 x 5.511.1105
PPL brush Ø 330 mm - 13"

Midi-R 75BT



- 2 x 5.511.1168
PPL brush Ø 360 mm - 14"



- 4.508.0646
Front squeegee blade L.925 mm
Shore 40 Th. 3 mm
- 4.508.0605
Rear squeegee blade L.1015 mm
Shore 30 Th. 4 mm



• Capable to work for the maintenance and deep cleaning of large areas (up to 2.600 m²) • User friendly control panel: forward speed setting, scrubbing and vacuuming selectors, battery charge indicator, traction direction indicator, key main switch • Large handle with traction driving lever for forward and backward directions • Self levelling brush plate • Cover removable without tools • Quick vacuum motor and filter inspection, without tools • Detergent solution filter • Detergent solution tank provided with large opening protected by quick locking cap.

| | Midi-R 66BT | Midi-R 75BT |
|-------------------------------|---------------------------------|---------------------------------|
| code | 8.517.0102 | 8.517.0105 |
| power supply | 24V | 24V |
| scrubbing / squeegee width | 660 / 900 mm | 750 / 900 mm |
| max working capacity | 3726 m ² /h | 4275 m ² /h |
| detergent tank capacity | 88 l / 23.25 gal | 88 l / 23.25 gal |
| recovery tank capacity | 91-95 l / 24.04-25 gal | 91-95 l / 24.04-25 gal |
| traction type / power | automatic / 300 W | automatic / 300 W |
| RPM - pressure on the brushes | 150 - 43,5 kg / 95.9 lbs | 150 - 48,5 kg / 107.48 lbs |
| brush motor power | 1000 W | 1000 W |
| detergent solution system | solenoid valve | solenoid valve |
| depression / vacuum motor | 1733 mmH ₂ O / 550 W | 1733 mmH ₂ O / 550 W |
| dimensions / weight | 133x73x117 cm / 150 kg | 133x73x117 cm / 153 kg |



Easy access to battery and vacuum motor compartment, without using tools. Large capacity shock and acid proof polyethylene tanks (88 l) avoid frequent refilling and idle time. 4 x 6V -180 Ah C5 batteries granting continuous working time up to 4-5 hours.


Adjustable speed ensures high precision in cleaning congested areas with obstacles. Intuitive controls reduce operator's training time. Safety thermal breakers prevent motor problems in case of overheating or operator's misuse.



Heavy duty V-shaped squeegee ensures perfect drying of every type of floor, even with large joints. Non-marking wheels avoid marks after the drying. Completely adjustable to fit any surface.



Strong mechanical control levers for heavy duty use. Large size drain hose for a fast emptying and a better cleaning of the recovery tank. Quick fitting battery charger plug.

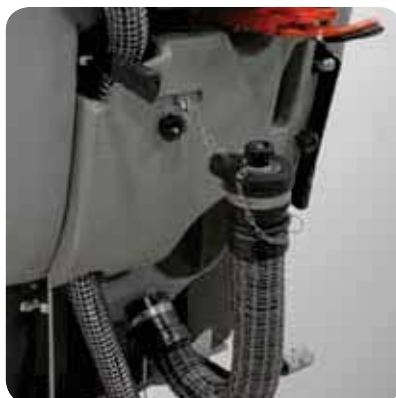

Optional accessories:



- 4 x 0.107.0004
Tubular battery Pb-acid
6V 180Ah C5



- 4 x 0.107.0072
GEL Battery 6 MFP 180
6V 180Ah C5



- 0.108.0002
Battery Charger 24V 25A
220-240/50-60



- 5.511.1495
On-board Battery charger
kit - 24V - 25A




- 4.508.0901 Polyurethane
front blade L.925 TH.3 Sh.40
- 4.508.0900 Polyurethane
rear blade L.1015 TH.4 Sh.40



- 5.511.1106
Tynex brush Ø 330 mm-13"
- 5.511.1246
Tynex brush Ø 360 mm-14"



- 5.511.1255
PPL 0,03 brush Ø 330 mm-13"
- 5.511.1169
PPL 0,03 brush Ø 360 mm-14"



- 5.511.1202
PES brush Ø 330 mm-13"
- 5.511.1203
PES brush Ø 360 mm - 14"



- 5.511.1107
EWU pad driver Ø 330 mm-13"
- 5.511.1129
EWU pad driver Ø 360 mm-14"



- 6.508.0030 - Ø 340 mm-13"- beige
- 6.508.0037 - Ø 340 mm-13"- green
- 6.508.0044 - Ø 340 mm-13"- black

- 6.508.0143 - Ø 380 mm-15"- beige
- 6.508.0144 - Ø 380 mm-15"- green
- 6.508.0141 - Ø 380 mm-15"- black